

STERIDIUM

2400L Laboratory Incubator

Model i2400



2400L Laboratory Incubator

Model i2400

Product Specifications

Chamber Capacity	2400L
Chamber Dimensions	865 x 910 x 1434 mm (w d h)
External Dimensions	2220 x 1154 x 2091 mm (w d h)
Chamber Material	Stainless Steel (304 L)
External Material	Durable epoxy powder-coated steel
Temperature Range	(ambient+7) to 80C
Temperature Sensor	pt100
Temporal Stability	+/- 0.1 C
Spatial Stability	+/- 2C
Shelf Positions	30 (15 per side)
Shelves Supplied	6 (3 per side)
Shelf Support Spacing	75
Insulation Type	Mineral wool
Insulation Thickness	50 mm



2400L Laboratory Incubator

Model i2400

Product Specifications

Electrical Supply	Three phase, 380-41V, 50Hz (alternatives available on request)
Electrical Connection Rating	20 Amps / Phase
Circulating fans	2 - Base mounted
Countdown Timer	Included
Controller Type	Intelligent PID - microprocessor
Readout	Digital LCD
Place of manufacture	Brisbane, Australia



Brisbane, Australia
 +61 7 55 931 352
 sales@steridium.com
 steridium.com




STERIDIUM

2400L Laboratory Incubator

Model i2400

Options / Accessories

- Additional Shelf
- Inner Viewing Door - Tempered Glass
- Double Glazed Door
- Castors
- Side Access Port - 50 mm
- Calibration Certificate
- 8 Step Programmable Controller - 4 Ramp/Dwell Pairs
- ISPM15 Compliant Export Crating
- Co2 Control - See model ico2-2400
- Cooling below ambient - See model ir-2400

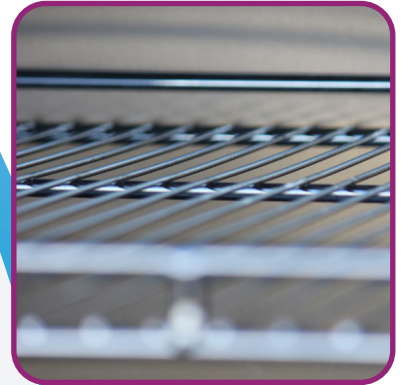

Brisbane, Australia

+61 7 55 931 352

sales@steridium.com

steridium.com

